


- **Series 60** - chassis mounting with solder connections on the top face
- **Series 65** - printed circuit mounting
- Up to **15 kV** stand-off, **12.5 kV** switching at **50 W** maximum
- **5, 12 and 24 V** coils
- Tungsten plated contacts ensure a long and reliable life
- **Additional build options are available**
- Many benefits compared to industry standard relays (see last page)

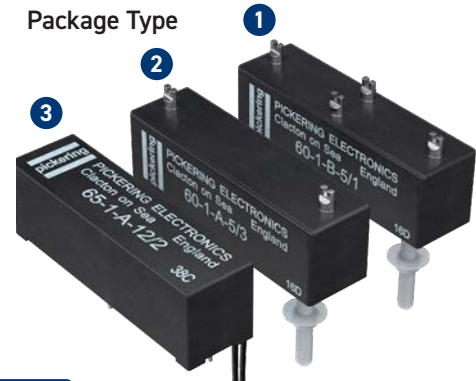

The Series 60 and 65 ranges of high voltage reed relays have been manufactured for many years and remain popular due to their small size and ease of use.

Both Form A (energize to make) and Form B (energize to break) configurations are available and with appropriate control circuitry to ensure break before make for operate and release, it is usually possible to achieve a Form C (change-over) function by using the Form A and a Form B type together. However, a 1 Form C, up to 5 kV, is available within the Series 67 range.

Form B types are magnetically biased and should not be mounted directly onto ferrous metal chassis or less than 1.5 inches (38 mm) away from other relays as the coil operating voltage characteristics will be altered due to magnetic interaction. The coils of Form B relays are polarity sensitive, the positive connection is identified by a red spot.

Form A types can be mounted on ferrous chassis but a space of 1 inch (25 mm) should be allowed between adjacent relays. If similar relays with "push-on" connectors are preferred, please look at our Series 62 and Series 63.

Switch Ratings

1 Form A (energize to make)	1 Form B (energize to break)
Stand-off 5 kV, switching up to 3.5 kV	Stand-off 5 kV, switching up to 3.5 kV
Stand-off 10 kV, switching up to 7.5 kV	Stand-off 10 kV, switching up to 7.5 kV
Stand-off 15 kV, switching up to 12.5 kV	

Series 60, 65 switch ratings - contact ratings for each switch type

Switch No	Switch form	Power rating	Max. switch current	Max. carry current	Max. switching volts	Max. stand-off volts	Life expectancy ops typical (see Note ²)	Operate time inc bounce (max)	Release time
1	A or B	50 W	3 A	3.5 A	3500 (Note ¹)	5000	10 ⁸	3 ms	2 ms
2	A or B	50 W	3 A	3.5 A	7500 (Note ¹)	10000	10 ⁸	3 ms	2 ms
3	A	50 W	3 A	3.5 A	12500 (Note ¹)	15000	10 ⁸	3 ms	2 ms

Note¹: Switching Voltage

This high voltage rating is for **RESISTIVE loads only**. At these high voltages, even stray capacitance can generate very high current pulses, which can damage the contact plating causing welding of the reed switch. If there is capacitance in circuit, provision should be made to limit the surge, to within the current and power ratings of the relay.

Note²: Life Expectancy

The life of a reed relay depends upon the switch load and the end of life criteria. For example, for an 'end of life' contact resistance specification of 1Ω, switching low loads with the current less than 1 mA, or when 'cold' switching, typical life is expected to be greater than 1 x 10⁸ ops. At higher voltages and up to the maximum 50 W load (resistive), typical life is 1 x 10⁶ ops. In the event of abusive conditions, e.g. high currents due to capacitive inrushes, this figure reduces considerably. Pickering will be pleased to perform life testing with any particular load conditions.

Operating Voltages

Coil voltage - nominal	Must operate voltage - maximum at 25 °C	Must release voltage - minimum at 25 °C
5 V	3.75 V	0.5 V
12 V	9 V	1.2 V
24 V	18 V	2.4 V

Environmental Specification/Mechanical Characteristics

In the table below, the upper temperature limit can be extended to +125 °C if the coil drive voltage is increased to accommodate the resistance/temperature coefficient of the copper coil winding. This is approximately 0.4% per °C. This means that at 125 °C the coil drive voltage will need to be increased by approximately $40 \times 0.4 = 16\%$ to maintain the required magnetic drive level. Please contact sales@pickeringrelay.com for assistance.

Operating Temperature Range	-20 °C to +85 °C
Storage Temperature Range	-35 °C to +100 °C
Shock Resistance	50 g
Vibration Resistance (10 - 2000 Hz)	20 g
Soldering Temperature (max) (10 s max)	270 °C
Washability (Proper drying process is recommended)	Fully Sealed

Series 60 Coil data and type numbers

Device Type	Type Number	Coil (V)	Coil resistance	Max. contact resistance (initial)	Insulation resistance (minimum at 25 °C) (see Note ⁴)		Capacitance (typical) (see Note ³)	
					Switch to coil	Across switch	Closed switch to coil	Across open switch
1 Form A Switch No. 1 (5 kV) Package Type 1	60-1-A-5/1	5	35 Ω	0.12 Ω	10 ¹² Ω	10 ¹² Ω	3 pF	0.15 pF
	60-1-A-12/1	12	150 Ω					
	60-1-A-24/1	24	500 Ω					
1 Form A Switch No. 2 (10 kV) Package Type 1	60-1-A-5/2	5	35 Ω	0.12 Ω	10 ¹² Ω	10 ¹² Ω	3 pF	0.15 pF
	60-1-A-12/2	12	150 Ω					
	60-1-A-24/2	24	500 Ω					
1 Form A Switch No. 3 (15 kV) Package Type 2	60-1-A-5/3	5	15 Ω	0.12 Ω	10 ¹² Ω	10 ¹² Ω	3 pF	0.15 pF
	60-1-A-12/3	12	50 Ω					
	60-1-A-24/3	24	200 Ω					
1 Form B Switch No. 1 (5 kV) Package Type 1	60-1-B-5/1	5	35 Ω	0.12 Ω	10 ¹² Ω	10 ¹² Ω	3 pF	0.15 pF
	60-1-B-12/1	12	150 Ω					
	60-1-B-24/1	24	500 Ω					
1 Form B Switch No. 2 (10 kV) Package Type 1	60-1-B-5/2	5	35 Ω	0.12 Ω	10 ¹² Ω	10 ¹² Ω	3 pF	0.15 pF
	60-1-B-12/2	12	150 Ω					
	60-1-B-24/2	24	500 Ω					

Note³: Capacitance across open switch

The capacitance across the open switch was measured with other connections guarded.

Note⁴: Insulation resistance

Insulation resistance will reduce at higher temperatures. For more information on temperature effects [click here](#), or contact **Pickering** for more in depth guidance.

Series 65 Coil data and type numbers

Device Type	Type Number	Coil (V)	Coil resistance	Max. contact resistance (initial)	Insulation resistance (minimum at 25 °C) (see Note ⁴)		Capacitance (typical) (see Note ³)	
					Switch to coil	Across switch	Closed switch to coil	Across open switch
1 Form A Switch No. 1 (5 kV) Package Type 3	65-1-A-5/1	5	35 Ω	0.12 Ω	10 ¹² Ω	10 ¹² Ω	3 pF	0.15 pF
	65-1-A-12/1	12	150 Ω					
	65-1-A-24/1	24	500 Ω					
1 Form A Switch No. 2 (10 kV) Package Type 3	65-1-A-5/2	5	35 Ω	0.12 Ω	10 ¹² Ω	10 ¹² Ω	3 pF	0.15 pF
	65-1-A-12/2	12	150 Ω					
	65-1-A-24/2	24	500 Ω					
1 Form B Switch No. 1 (5 kV) Package Type 3	65-1-B-5/1	5	35 Ω	0.12 Ω	10 ¹² Ω	10 ¹² Ω	3 pF	0.15 pF
	65-1-B-12/1	12	150 Ω					
	65-1-B-24/1	24	500 Ω					
1 Form B Switch No. 2 (10 kV) Package Type 3	65-1-B-5/2	5	35 Ω	0.12 Ω	10 ¹² Ω	10 ¹² Ω	3 pF	0.15 pF
	65-1-B-12/2	12	150 Ω					
	65-1-B-24/2	24	500 Ω					

Note³: Capacitance across open switch

The capacitance across the open switch was measured with other connections guarded.

Note⁴: Insulation resistance

Insulation resistance will reduce at higher temperatures. For more information on temperature effects **click here**, or **contact Pickering** for more in depth guidance.

Washing Guidelines

Pickering do not make any specific recommendations on washing reed relays, due to the large number of factors in cleaning processes, however we do have suggestions on best practices. Click [here](#) for more information.

The technical information shown in this data sheet could contain inaccuracies or typographical errors. This information may be periodically changed or updated and these changes will be included in future versions of this data sheet.


For different values, latest specifications and product details, please contact your local Pickering sales office.

For **FREE** evaluation samples go to: pickeringrelay.com/samples


Series 60: Pin Configuration, Weights and Dimensional Data (dimensions in inches, millimeters in brackets)

Package Type 1

Sw. No.1 - 5 kV
Sw. No.2 - 10 kV



1 Form A
Weight: Typical 28.43 g

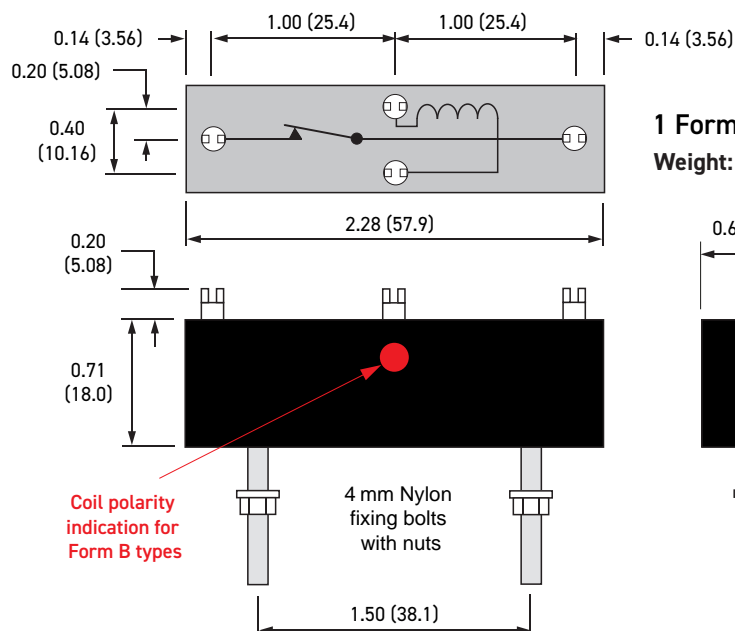


1 Form B
Weight: Typical 31.83 g

Coil polarity
indication for
Form B types


4 mm Nylon
fixing bolts
with nuts

Package Type 2

Sw. No.3 - 15 kV

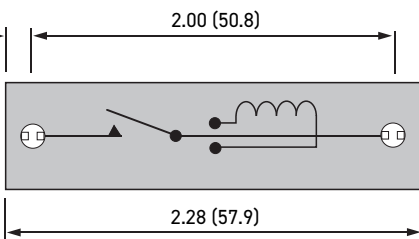

1 Form A
Weight: Typical 28.43 g

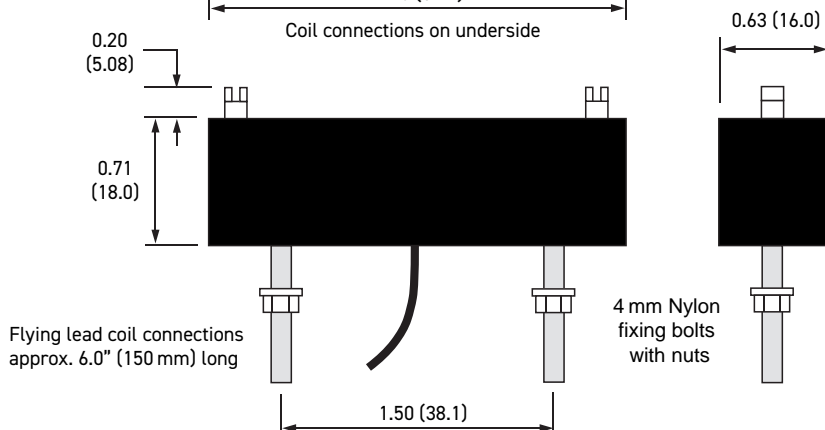


Important: For all Form B types, the correct coil polarity must be observed. The positive connection is shown by the red spot on the package.

Series 65: Pin Configuration, Weights and Dimensional Data (dimensions in inches, millimeters in brackets)

Package Type **3**

Sw. No.1 - 5 kV

Sw. No.2 - 10 kV

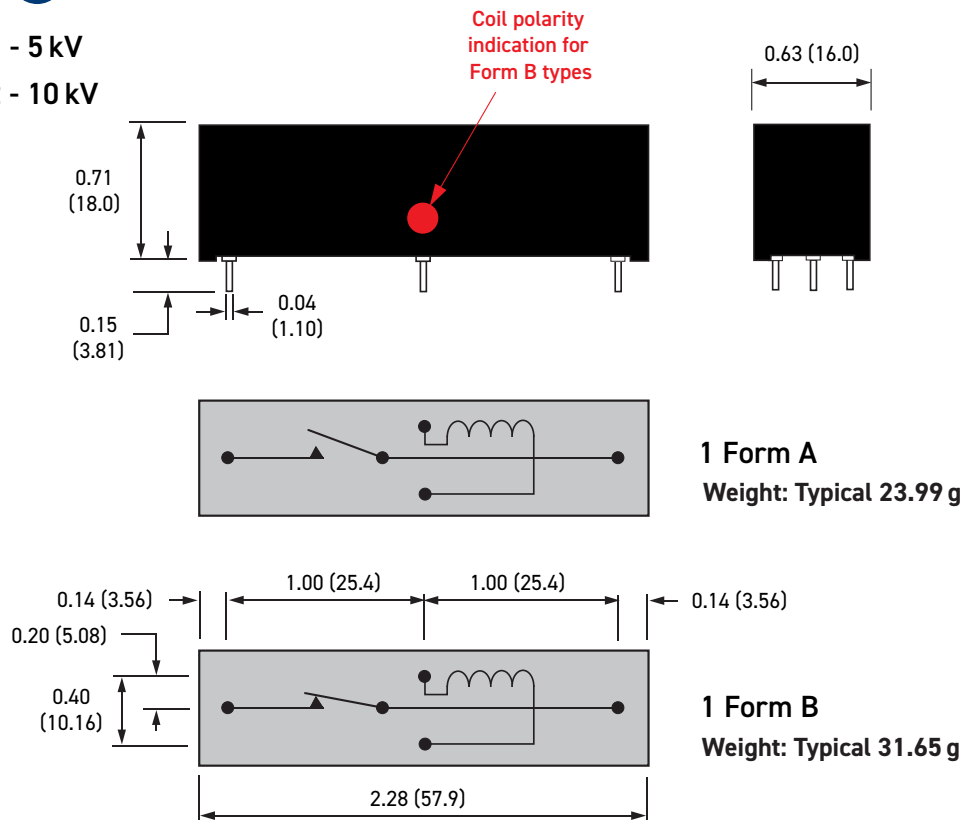



Important: For all Form B types, the correct coil polarity must be observed. The positive connection is shown by the red spot on the package.

Similar Relays Comparison

If the Series 60 and 65 are unsuitable for your application, Pickering also manufactures four other series of reed relays with similar characteristics, but in different package sizes.

Series Name		60-1-A			60-1-B		65-1-A		65-1-B		67-1-A			67-1-C		68-1-A		
Physical Outline											  							
Depth	mm (inches)	16.0 (0.63)					16.0 (0.63)				12.6 (0.495)							
Width		57.9 (2.28)					57.9 (2.28)				58.4 (2.3)							
Height		18.0 (0.71)					18.0 (0.71)				14.5 (0.57)							
Package Volume (mm³)		① 16676		② 16676		① 16676		③ 16676				9543			9543		9543	
Typical Weights (g)		28.43			31.83		23.99		31.65		14.53			13.58		16.47		
Contact Configuration		1-A (SPST)			1-B (SPNC)		1-A (SPST)		1-B (SPNC)		1-A (SPST)			1-C (SPDT)		1-A (SPST)		
Reed Switch Type		Dry			Dry		Dry		Dry		Dry			Dry		Dry		
Stand-off Voltage (V)		5000	10000	15000	5000	10000	5000	10000	5000	10000	5000	8000	10000	5000	5000	10000		
Switching Voltage (V)		3500	7500	12500	3500	7500	3500	7500	3500	7500	3500	6000	7500	2500	3500	7500		
Switching Current (A)		3					3				3			3		3		
Carry Current (A)		3.5					3.5				3.5			5	3.5	3.2	3.5	
Switch Power (W)		50					50				50			200	50	100	50	

Series Name		62-1-A		62-1-B		63-1-A				63-1-B		
Physical Outline												
Depth	mm (inches)	19.05 (0.75)				19.05 (0.75)						
Width		63.5 (2.5)				63.5 (2.5)						
Height		21.3 (0.84)				21.3 (0.84)						
Package Volume (mm³)		① 25767				② 25767						
Typical Weights (g)		44.16		44.69		45.47				44.69		
Contact Configuration		1-A (SPST)		1-B (SPNC)		1-A (SPST)				1-B (SPNC)		
Reed Switch Type		Dry		Dry		Dry				Dry		
Stand-off Voltage (V)		5000	10000	5000	10000	5000	10000	15000	20000	5000	10000	20000
Switching Voltage (V)		3500	7500	3500	7500	3500	7500	12500	12500	3500	7500	12500
Switching Current (A)		3				3						
Carry Current (A)		3.5				3.5						
Switch Power (W)		50				50						

Reed Relay Selection Tool

Because Pickering offer the largest range of high-quality reed relays, sometimes it can be difficult to find the right reed relay you require. That is why we created the Reed Relay Selector, this tool will help you narrow down our offering to get you the correct reed relay for your application. To try the tool today go to: pickeringrelay.com/reed-relay-selector-tool

Standard Build Options

The Series 60 and 65 Reed Relays are available with a number of standard build options to tailor them to your specific application. These options are detailed in the table below. If you decide to go ahead and specify one, or more, of these options you will be allocated a unique part number suffix.


Mechanical Build Options	Electrical Build Options
Special pin configurations or pin lengths	Different coil resistance
Special print with customer's own part number or logo	Different stand-off or switching voltage
Custom packaging	Operate or de-operate time
Equivalents to competitors discontinued parts	Pulse capability
	Enhanced specifications
	Equivalents to competitors discontinued parts
	Non-standard coil voltages and resistance figures
	Special Life testing under customer's specific load conditions
	Specific environmental requirements

Customization

If your specific requirements are not met by standard relay, or any of the standard build options, please speak to us to discuss producing a customized reed relay to service your specific application: pickeringrelay.com/contact

3D Models

Interactive 3D models of the complete range of Pickering relay products in STEP, IGS and SLDPR formats can be downloaded from the website: pickeringrelay.com/3d-models

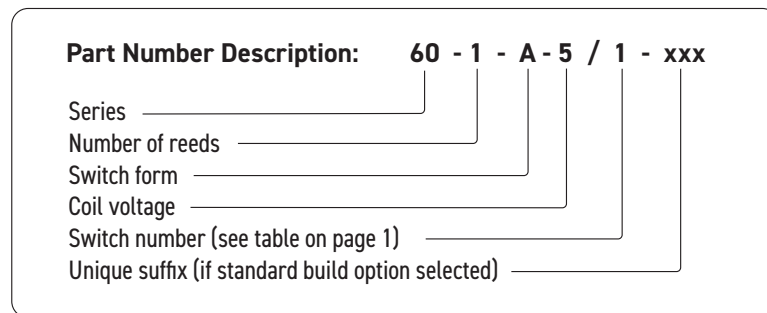

Help

If you need any technical advice or other help, please do not hesitate to contact our Technical Sales Department. We will always be pleased to discuss Pickering relays with you. email: techsales@pickeringrelay.com

Contact Us

UK Headquarters - email: sales@pickeringrelay.com | Tel. +44 1255 428141

USA - email: ussales@pickeringrelay.com | Tel. +1 781 897 1710

Germany - email: desales@pickeringtest.com | Tel. +49 89 125 953 160

France - email: frsales@pickeringtest.com | Tel. +33 9 72 58 77 00

Nordic - email: ndsales@pickeringtest.com | Tel. +46 340 69 06 69














Czech Republic: czsales@pickeringtest.com | Tel. +420 558-987-613

China - email: chinasales@pickeringtest.com | Tel. +86 4008 799 765

For a full list of agents, distributors and representatives visit: pickeringrelay.com/agents



10 Key Benefits of Pickering Reed Relays

Key Benefit	Pickering Reed Relays	Typical Industry Reed Relays	
1 Instrumentation Grade Reed Switches	Instrumentation Grade Reed Switches with vacuum sputtered Ruthenium plating to ensure stable, long life up to 5x10E9 operations.	Often low grade Reed Switches with electroplated Rhodium plating resulting in higher, less stable contact resistance.	
2 Formerless Coil Construction	Formerless coil construction increases the coil winding volume, maximizing magnetic efficiency, allowing the use of less sensitive reed switches resulting in optimal switching action and extended lifetime at operational extremes.	Use of bobbins decreases the coil winding volume, resulting in having less magnetic drive and a need to use more sensitive reed switches which are inherently less stable with greatly reduced restoring forces.	  Pickering former-less coil Typical industry coil wound on bobbin
3 Magnetic Screening	Mu-metal magnetic screening (either external or internal), enables ultra-high PCB side-by-side packing densities with minimal magnetic interaction, saving significant cost and space. Pickering Mu-Metal magnetic screen - interaction approx. 5%	Lower cost reed relays have minimal or no magnetic screening, resulting in magnetic interaction issues causing changes in operating and release voltages, timing and contact resistance, causing switches to not operate at their nominal voltages. Typical industry screen - interaction approx. 30%	  X-Ray of Pickering mu-metal magnetic screen X-Ray of typical industry mu-metal magnetic screen
4 SoftCenter™ Technology	SoftCenter™ technology, provides maximum cushioned protection of the reed switch, minimising internal lifetime stresses and extending the working life and contact stability.	Transfer moulded reed relays (produced using high temperature/pressure), result in significant stresses to the glass reed switch which can cause the switch blades to deflect or misalign leading to changes in the operating characteristics, contact resistance stability and operating lifetime.	  Pickering soft center protection of the reed switch Typical industry thermo-setting hard moulded protection of the reed switch
5 100% Dynamic Testing	100% testing for all operating parameters including dynamic contact wave-shape analysis with full data scrutiny to maintain consistency.	Simple dc testing or just batch testing which may result in non-operational devices being supplied.	Dynamic Contact Resistance Test 
6 100% Inspection at Every Stage of Manufacturing	Inspection at every stage of manufacturing maintaining high levels of quality.	Often limited batch inspection.	
7 100% Thermal Cycling	Stress testing of the manufacturing processes, from -20 °C to +85 °C to -20 °C, repeated 3 times.	Rarely included resulting in field failures.	
8 Flexible Manufacturing Process	Flexible manufacturing processes allow quick-turn manufacturing of small batches.	Mass production: Usually large batch sizes and with no quick-turn manufacturing.	
9 Custom Reed Relays	Our reed relays can be customized easily, e.g. special pin configurations, enhanced specifications, non-standard coil or resistance figures, special life testing, low capacitance, and more.	Limited ability to customize.	
10 Product Longevity	Pickering are committed to product longevity; our reed relays are manufactured and supported for more than 25 years from introduction, typically much longer.	Most other manufacturers discontinue parts when they reach a low sales threshold; costing purchasing and R&D a great deal of unnecessary time and money to redesign and maintain supply.	

For more information go to: pickeringrelay.com/10-key-benefits