

Dual-in-Line DIL/DIP Reed Relays

Up to 10 Watts switching for dry reed

Features

- Encapsulated in a plastic package with internal mu-metal magnetic screen
- Wide range of switch configurations - 1 Form A, 1 Form B, 2 Form A, 1 Form C
- Dry and mercury wetted switches are available with the same pin configuration and footprint (see "A useful tip" below)
- 5, 12 and 24 Volt coils with or without internal diode



The Series 97 is a range of reed relays with pins in the popular Dual-in-Line format.

Being encapsulated in a plastic package using a very high resistivity epoxy resin gives the device several advantages over the more usual moulded construction. The reed switches are not subjected to the high temperatures and pressures of the transfer moulding process with the inherent risk of damage to the sensitive glass to metal seals. The construction incorporates a mu-metal wrap around the operating coil to eliminate magnetic interaction problems. Higher drive levels are achieved, allowing a full range of switching configurations including 1 or 2 Form A (energize to make), Form C (change-over) and Form B (energize to break) in both dry and mercury wetted types.

If higher coil resistance levels are required, please look at our Series 98 DIL relays which may be driven directly from 74HC or 74HCT CMOS logic.

A useful tip

If there is a chance that you might want to use mercury wetted relays instead of dry relays at a later date, for example to increase switch ratings, lay out the PCB initially as though for the mercury wetted type with pins 1 and 14 uppermost. This allows upgrading later without PCB changes. The mercury versions in the Series 97 have identical pin configurations to the dry types.

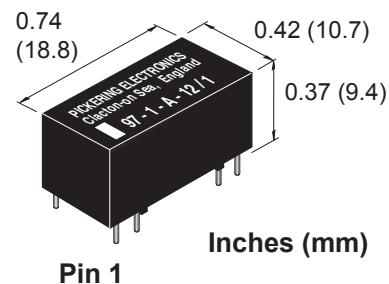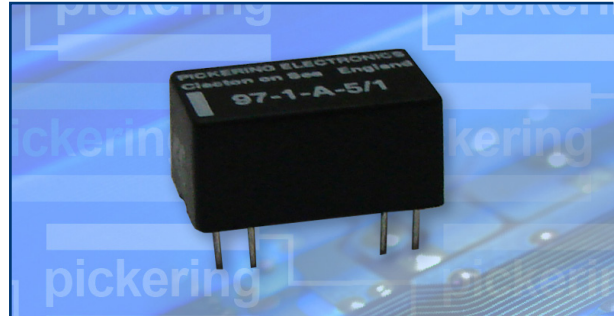

Switch Ratings - Dry switches

- 1 Form A (energize to make), 10 watts at 200V
- 1 Form A (energize to make), 10 watts at 300V
- 1 Form B (energize to break), 10 watts at 200V
- 1 Form C (change-over), 3 watts at 200V
- 2 Form A (energize to make), 10 watts at 200V

Switch Ratings - Mercury Wetted switches

- 1 Form A (energize to make), 50 watts at 500V

Dry Reed - Series 97 switch ratings

- The contact ratings for each switch type are shown below:

Switch No	Switch form	Power rating	Max. switch current	Max. carry current	Max. switching volts	Life expectancy ops typical (see Note ¹ below)	Special features
1	A or B	10 W	0.5 A	1.2 A	200	10E8	General purpose
3	C	3 W	0.25 A	1.2 A	200	10E7	Change over
4	A	10 W	0.5 A	1.2 A	300	10E8	500V stand-off

Switch no.2 is particularly good for switching low currents and/or voltages. It is the ideal switch for A.T.E. systems where cold switching techniques are often used. Where higher power levels are involved, switch no.1 is more suitable.

Operating voltages

Coil voltage - nominal	Must operate voltage - maximum at 25°C	Must release voltage - minimum at 25°C
5 V	3.75 V	0.5 V
12 V	9 V	1.2 V
24 V	18 V	2.4 V

Dry Relay - Coil data and type numbers

Device type	Type Number	Coil (V)	Coil resistance	Max. contact resistance (initial)
1 Form A (energize to make) General Purpose Switch No. 1	97-1-A-5/1D	5	500 Ω	0.15 Ω
	97-1-A-12/1D	12	1000 Ω	
	97-1-A-24/1D	24	3000 Ω	
1 Form A (energize to make) High Voltage Switch No. 4	97-1-A-5/4D	5	500 Ω	0.15 Ω
	97-1-A-12/4D	12	1000 Ω	
	97-1-A-24/4D	24	3000 Ω	
1 Form C (change-over) Switch No. 3	97-1-C-5/3D	5	500 Ω	0.20 Ω
	97-1-C-12/3D	12	1000 Ω	
	97-1-C-24/3D	24	3000 Ω	
1 Form B (energize to break) General Purpose Switch No. 1	97-1-B-5/1D	5	1000 Ω	0.15 Ω
	97-1-B-12/1D	12	3000 Ω	
	97-1-B-24/1D	24	3000 Ω	
2 Form A (energize to make) General Purpose Switch No. 1	97-2-A-5/1D	5	500 Ω	0.17 Ω
	97-2-A-12/1D	12	1000 Ω	
	97-2-A-24/1D	24	3000 Ω	

When an internal diode is required, the suffix D is added to the part number as shown in the table.

Mercury Reed: Series 97 switch ratings

- The contact ratings for each switch type are shown below:

Switch No	Switch form	Power rating	Max. switch current	Max. carry current	Max. switching volts	Life expectancy ops typical (see Note ¹ below)	Special features
6	A	50 W	2 A	3 A	500	10E8	Standard Mercury

Mercury Relay: Coil data and type numbers

Device type	Type Number	Coil (V)	Coil resistance	Max. contact resistance (initial)
1 Form A (energize to make) Switch No. 6	97-1-A-5/6D	5	140 Ω	0.075 Ω
	97-1-A-12/6D	12	500 Ω	
	97-1-A-24/6D	24	1500 Ω	

When an internal diode is required, the suffix D is added to the part number as shown in the table.

Environmental specification

Standard operating temperature range: -20 to +85 °C.

Note: The upper temperature limit can be extended to +125 °C if the coil drive voltage is increased to accommodate the resistance/temperature coefficient of the copper coil winding. This is approximately 0.4% per °C. This means that at 125 °C the coil drive voltage will need to be increased by approximately $40 \times 0.4 = 16\%$ to maintain the required magnetic drive level. Please contact sales@pickeringrelay.com for assistance if necessary.

Vibration: Maximum 20 G **Shock:** Maximum 50 G

Note! Life expectancy

The life of a reed relay depends upon the switch load and end of life criteria. For example, for an 'end of life' contact resistance specification of 1 Ω, switching low loads (10 V at 10 mA resistive) or when 'cold' switching, typical life is approx 1×10^8 ops. At the maximum load (resistive), typical life is 1×10^7 ops. In the event of abusive conditions, e.g. high currents due to capacitive inrushes, this figure reduces considerably. Pickering will be pleased to perform life testing with any particular load condition.

Main contact:

UK Headquarters: email: sales@pickeringrelay.com | Tel. +44 1255 428141

Worldwide contacts:

USA: email: ussales@pickeringtest.com | Tel. +1 781 897 1710

Germany: email: desales@pickeringtest.com | Tel. +49 89 125 953 160

China: email: johnson@tomtech.cn | Tel. 0755 8374 5452

For a full list of agents and representatives visit: pickeringrelay.com/agents




ISO9001 Manufacture of
Reed Relays FM 29036




Pin Configuration and Dimensional Data

Dimensions in Inches (Millimeters in brackets)

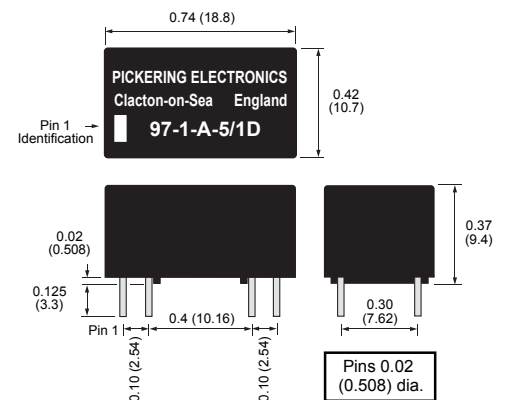

Schematics are shown from UNDERNEATH the relay.

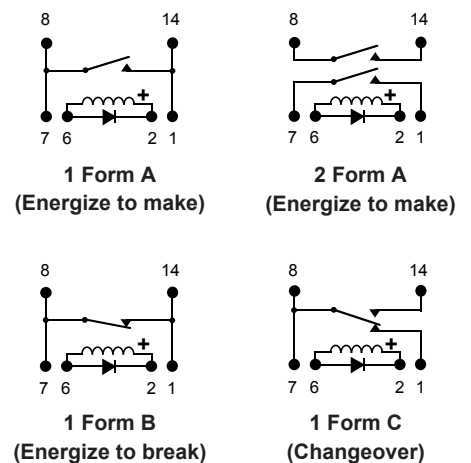

Important: Where the optional internal diode is fitted or for all Form B types, the correct coil polarity must be observed, as shown by the + symbol on the schematics.

3D Models: Interactive models of the complete range of Pickering relay products can be downloaded from the web site.

Mercury Relays



With the exception of the position insensitive type, mercury relays should be mounted vertically with pin 1 uppermost.

Order Code

97 - 1 - A - 5 / 2 D

Series _____
 Number of reeds _____
 Switch form _____
 Coil voltage _____
 Switch number (See table adjacent) _____
 Diode if fitted (Omit if not required) _____

Help

If you need any technical advice or other help, for example, any special tests that you would like carried out, please do not hesitate to contact our Technical Sales Department. We will always be pleased to discuss Pickering relays with you. email: techsales@pickeringrelay.com

Please ask us for a FREE evaluation sample.



pickeringrelay.com